




QUADRATURE PHASE SHIFT KEYING MODULATION/DEMODULATION TRAINER

MODEL - COM117L

This trainer has been designed with a view to provide practical/experimental knowledge of Q.P.S.K. Modulation / Demodulation.

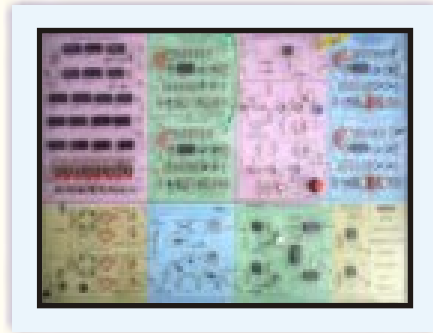

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. On Board Modulating Digital Data signal generator to generate any binary input word with Bit clock & Word clock.
Word Length : 8 Bits.
Word Clock Frequency : 10 KHz
Data Format : NRZ, Even Bits I and Odd bits Q signals.
3. On Board synchronized RF Carrier : 1.28 MHz - Sine & Cosine.
4. Modulator Type : Using two Balanced Modulators with two PSK and adder
5. Demodulator Type : Balanced Modulator detectors.
6. Decision Threshold : Comparator
7. Standard Accessories : 1. A Training Manual.
2. Connecting Patch cords.

EXPERIMENTS

1. To study theory of QPSK Modulation & Demodulation.
2. To generate QPSK signal.
3. To demodulate QPSK signal using balanced modulators.
4. To observe QPSK modulated output for different input binary inputs.
5. To observe QPSK Phasor diagrams on CRO for different binary inputs.

Sigma Trainers
E-103, Jai Ambe Nagar,
Near Udgam School, Thaltej,
AHMEDABAD - 380054.

Phone : 079-26852427 / 26767512
Fax : 079-26840290 / 26759661
ISDN : 079-26859162 / 26853758
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-