




# PULSE CODE DEMODULATION RECEIVER TRAINER

MODEL - COM204L

This trainer has been designed with a view to provide practical and experimental knowledge of Pulse Code Demodulation technique as practically implemented in Digital Communication systems on a SINGLE P.C.B.

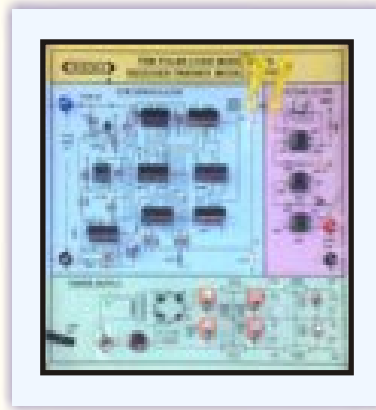

## SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. On Board Sampling Pulse signal generator.  
Frequency Range - Fast Mode : 1.2 Mhz
3. Synchronisation circuit for Sampling generator with sync pulses.
4. PCM Bit : 3 or 4 bit selectable by switch.
5. Demodulator Sections : Low pass filter
6. All parts are soldered on single pin TAGS on single PCB of size 12" x 9" with complete circuit diagram  
Screen-printed in multi colour.
7. Standard Accessories :
  1. A Training Manual.
  2. Connecting Patch cords

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

**Sigma Trainers and Kits**  
E-113, Jai Ambe Nagar,  
Near Udgam School,  
Thaltej,  
AHMEDABAD - 380054.  
INDIA.

**Phone(O): +91-79-26852427/ 26850829**  
**Phone(F): +91-79-26767512/ 26767648**  
**Fax : +91-79-26840290/ 26840290**  
**Mobile : +91-9824001168**  
**Email : sales@sigmatrainers.com**  
**: sigmatrainers@sify.com**  
**Web : www.sigmatrainers.com**

**Dealer:-**