




CHARACTERISTICS OF DIAC AND TRIAC

MODEL-THY03

This trainer has been designed with a view to provide practical and experimental knowledge of DIAC & TRIAC.

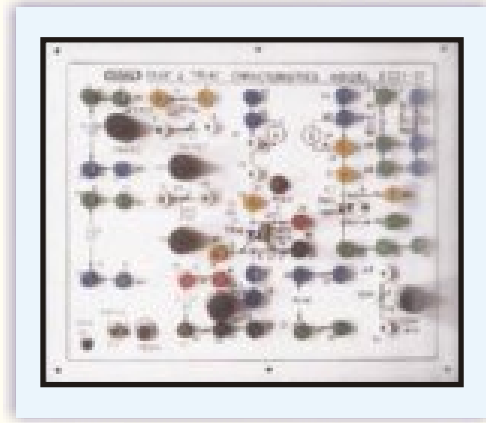

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in Regulated Power supply : 0-40 V DC/100 mA continuously variable.
0-10 V DC/100 mA continuously variable.
3. Following parts provided on Single PCB with connecting terminals.
DIAC - Db3 - 1no.
TRIAC- BT136 - 1no.
4. All parts are soldered on single PCB of size 8" x 7" with complete circuit diagram screen-printed.
5. Standard Accessories : 1. A Training Manual.
2. Connecting Patch cords.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers and Kits
E-113, Jai Ambe Nagar,
Near Udgam School,
Thaltej,
AHMEDABAD - 380054.
INDIA.

Phone(O): +91-79-26852427/ 26850829
Phone(F): +91-79-26767512/ 26767648
Fax : +91-79-26840290/ 26840290
Mobile : +91-9824001168
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-