




# DOUBLE TUNED RF AMPLIFIER

MODEL AMP30

This board has been designed with a view to provide practical & experimental knowledge of Double tuned Amplifier.

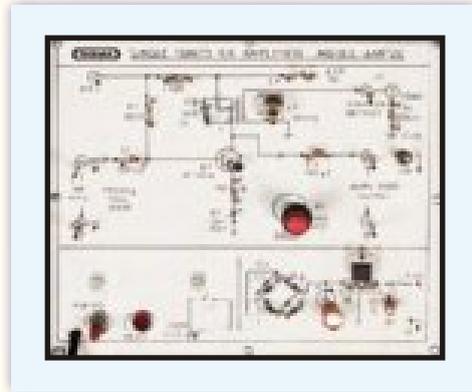

## SPECIFICATIONS

1. The complete circuit is printed on a single P.C.B.
2. All parts are soldered on single pin tag for easy replacement.
3. Explanation, Observation, Alignment and adjustment of Internal and external controls is possible due to Single P.C.B.
4. Easy identification of different parts is possible at a glance.
5. Easy measurement of voltages and observation of waveforms at any point. Test Points are provided on P.C.B.
6. A manual having practical detail is provided with the board.
7. Built-in Power supply: +6V DC at 200mA IC Regulated & short circuit protected.
8. Transistor BF194A - 1 No
9. Power requirement : 230V, 50Hz AC.
10. Standard Accessories : 1. A manual having practical details.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

**Sigma Trainers**  
**E-103, Jai Ambe Nagar,**  
**Near Udgam School, Thaltej,**  
**AHMEDABAD - 380054.**

**Phone : 079-26852427 / 26767512**  
**Fax : 079-26840290 / 26759661**  
**ISDN : 079-26859162 / 26853758**  
**Email : sales@sigmatrainers.com**  
**: sigmatrainers@sify.com**  
**Web : www.sigmatrainers.com**

**Dealer:-**