




HYBRID (h) PARAMETERS OF TRANSISTOR

MODEL - AMP39

This board has been designed with a view to provide practical and experimental knowledge of Hybrid (H) Parameter of Transistor.

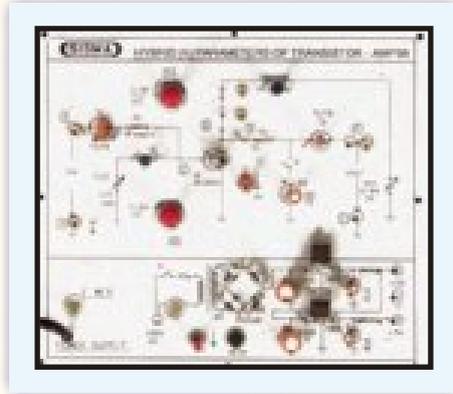

SPECIFICATIONS

1. The complete circuit is printed on a single P.C.B.
2. All parts are soldered on single pin tag for easy replacement.
3. Explanation, Observation, Alignment and adjustment of Internal and external controls is possible due to Single P.C.B.
4. Easy identification of different parts is possible at a glance.
5. Easy measurement of voltages and observation of waveforms at any point. Test Points are provided on P.C.B.
6. A manual having practical detail is provided with the board.
7. Power requirement : 230V, 50Hz AC.
8. Built-in Power supply : 0-5VDC at 200mA IC Regulated & short circuit protected
0-9VDC at 200mA IC Regulated & short circuit protected
9. Transistor 2N 3904 - 1 No. in CE amplifier circuit
10. Standard Accessories : 1. A manual having practical details.
2. Connecting Patch Cords.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers
E-103, Jai Ambe Nagar,
Near Udgam School, Thaltej,
AHMEDABAD - 380054.

Phone : 079-26852427 / 26767512
Fax : 079-26840290 / 26759661
ISDN : 079-26859162 / 26853758
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-