




VERIFICATION OF SAMPLING THEOREM USING PAM TECHNIQUE TRAINER

MODEL- COM105N

This trainer has been designed with a view to provide practical & experimental Knowledge of sampling and reconstruction of analog signal using PAM technique.

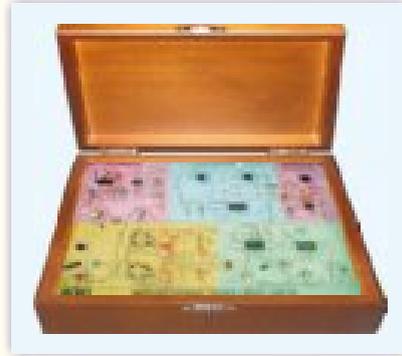

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based power supply.
3. On Board AF Modulating signal generator - Sine wave
Frequency Range : 300Hz to 3.4KHz
Amplitude : 0 to 5 Vpp.
4. On Board Sampling Pulse signal generator.
Frequency Range : 2 KHz to 32 KHz.
Pulse width : Variable.
5. Types of sampling processes : Natural sampling, Flattop sampling, Sample and Hold.
6. Demodulator Sections : Low Pass Filter
7. Standard Accessories :
 1. A Training Manual.
 2. Connecting Patch cords.

EXPERIMENTS

1. To study theory of different types of Sampling process.
2. To generate PAM signal by flattop sampling.
3. To generate PAM signal by Natural sampling.
4. To generate PAM signal by S/H circuit.
5. To demodulate using Low Pass Filter.
6. To see the effect on PAM modulated output by varying the amplitude and frequency of modulating signal.
7. To vary Pulse width of Sampling frequency and see the effect on amplitude of S/H and reconstructed signal.
8. To vary frequency of Sampling pulse generator and see the aliasing effect.
9. To prove Nyquist's Sampling Theorem.

Sigma Trainers
E-103, Jai Ambe Nagar,
Near Udgam School, Thaltej,
AHMEDABAD - 380054.

Phone : 079-26852427 / 26767512
Fax : 079-26840290 / 26759661
ISDN : 079-26859162 / 26853758
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-