




TIME DIVISION MULTIPLEXING/ DEMULTIPLEXING TRAINER

MODEL - COM109L

This trainer has been designed with a view to provide practical and experimental knowledge of 4 channel Time Division Multiplexing Demultiplexing using PAM technique on a SINGLE PCB.

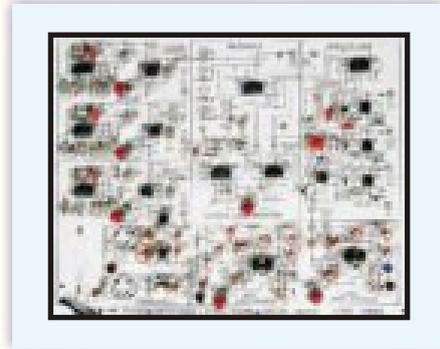

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based power supply.
3. On Board two synchronized Input signals generators
Frequency Range : 1KHz and 2 KHz.
4. On Board Sampling Pulse signal generator.
Frequency Range : 2 KHz to 64 KHz.
5. Modulator Sections : TDM Multiplexing
6. Demodulator Sections : TDM Demultiplexing & Low Pass Filter
7. Standard Accessories : 1. A Training Manual.
2. Connecting Patch cords.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers and Kits
E-113, Jai Ambe Nagar,
Near Udgam School,
Thaltej,
AHMEDABAD - 380054.
INDIA.

Phone(O): +91-79-26852427/ 26850829
Phone(F): +91-79-26767512/ 26767648
Fax : +91-79-26840290/ 26840290
Mobile : +91-9824001168
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-