




# PA SYSTEM TRAINER

MODEL - PADM100

This trainer has been designed with a view to provide practical and experimental knowledge of a general circuit of PUBLIC ADDRESS AMPLIFIER on SINGLE P.C.B.

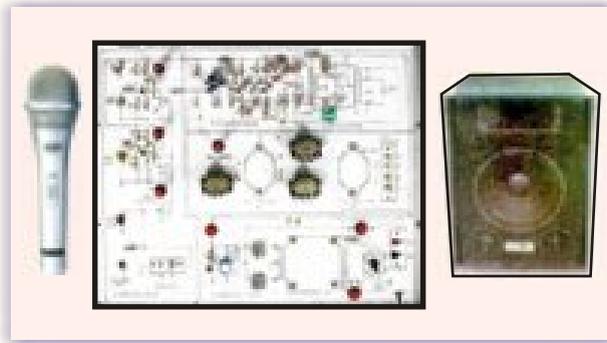

## SPECIFICATIONS

1. PA System Amplifier Output : 115 W max.  
Pre-amp output 250 mV,  
Line output 1 V,
2. Inputs : 5 Mike 0.5 mV, 2 AUX, 50 mV and 150 mV
3. Frequency response : 60 Hz to 15 KHz,
4. Tone controls : Bass, Treble Cut Boost Type PA Tie microphone with 12 feet cable:  
Frequency response : 100 Hz to 15 KHz  
Sensitivity : 3.5 mV/pa,  
Impedance : 1000 Ohms
5. Two Speakers : 12"/ 100 Watts 16 ohms Full range speakers with Wooden cabinet
6. PA microphone with 12 feet cable and microphone stand  
Frequency response : 100 Hz to 10 KHz,  
Sensitivity : 2 mV/pa,  
Impedance : 600 Ohms
7. Standard Accessories : A Training Manual

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

**Sigma Trainers and Kits**  
E-113, Jai Ambe Nagar,  
Near Udgam School,  
Thaltej,  
AHMEDABAD - 380054.  
INDIA.

**Phone(O): +91-79-26852427/ 26850829**  
**Phone(F): +91-79-26767512/ 26767648**  
**Fax : +91-79-26840290/ 26840290**  
**Mobile : +91-9824001168**  
**Email : sales@sigmatrainers.com**  
**: sigmatrainers@sify.com**  
**Web : www.sigmatrainers.com**

**Dealer:-**