




# TDMA TRAINER

MODEL- TDMA100

This trainer has been designed with a view to provide practical and experimental knowledge of TDMA .

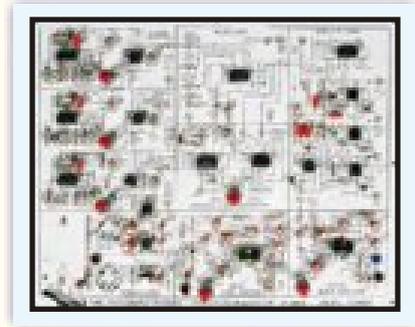

## SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based power supply.
3. On Board Two Input signals generators.  
Sine wave - Frequency : 250Hz, 500Hz, 1KHz & 2KHz  
Amplitude : 0 to 5 Vpp.
4. On Board Control Pulse signal generator.  
Frequency Range : 2 KHz to 128 KHz.
5. Switching Sections : Time-Space-Time Switching (T-S-T)
6. Space Switching Controls : 16 Bit addresses
7. Low Pass Filters : 3.4 KHz cutoff frequency.
8. All parts are soldered on single PCB with complete circuit diagram  
Screen-printed in multicolour
9. Standard Accessories :
  1. A Training Manual
  2. Connecting Patch cords.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

**Sigma Trainers and Kits**  
E-113, Jai Ambe Nagar,  
Near Udgam School,  
Thaltej,  
AHMEDABAD - 380054.  
INDIA.

**Phone(O): +91-79-26852427/ 26850829**  
**Phone(F): +91-79-26767512/ 26767648**  
**Fax : +91-79-26840290/ 26840290**  
**Mobile : +91-9824001168**  
**Email : sales@sigmatrainers.com**  
**: sigmatrainers@sify.com**  
**Web : www.sigmatrainers.com**

**Dealer:-**