




ADAPTIVE DELTA MODULATION /DEMODULATION TRAINER

MODEL - COM113K

This trainer has been designed with a view to provide practical and experimental knowledge of Adaptive Delta Modulation /Demodulation.

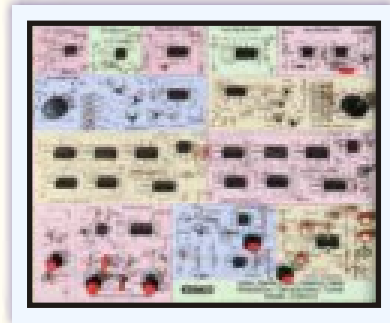

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based power supply.
3. On Board Modulating Sine wave signal generator
Frequency Range : 300 Hz to 3.4 KHZ
Amplitude : 0 to 5 Vpp.
4. On Board Sampling Pulse signal generator -
Frequency : 10 KHz to 1MHz in two ranges
Pulse width : Variable.
5. Modulator Sections : Comparator, S/H and Integrator, Adaptive Control
6. Demodulator Sections : Integrator, Adaptive Control
Low Pass Filter - Cut off frequency - 3.4KHz.
7. All parts are soldered on single PCB with complete circuit diagram screen-printed in multicolor.
8. Standard Accessories : 1. A Training Manual
2. Connecting Patch cords.

EXPERIMENTS

1. To study theory of different types of delta Modulation & Demodulation
2. To generate ADM signal and demodulate them
3. To see the effect of sampling clock frequency on output.

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers and Kits
E-113, Jai Ambe Nagar,
Near Udgam School,
Thaltej,
AHMEDABAD - 380054.
INDIA.

Phone(O): +91-79-26852427/ 26850829
Phone(F): +91-79-26767512/ 26767648
Fax : +91-79-26840290/ 26840290
Mobile : +91-9824001168
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-