




DSB/SSB AM TRANSMITTER TRAINER

MODEL - COM411

This trainer has been designed with a view to provide practical and experimental Knowledge of DSB/SSB Amplitude Modulation Transmitter technique on a SINGLE P.C.B.

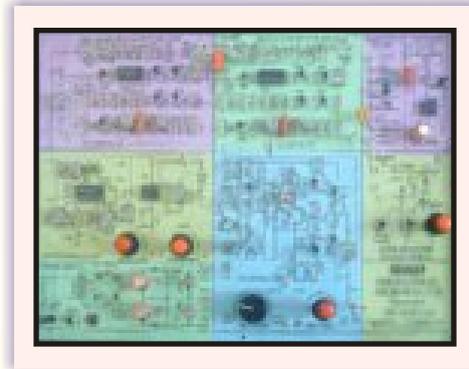

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based power supply.
3. On Board AF Modulating signal generator - Sine wave
Frequency Range : 300Hz to 3.4 KHz
Amplitude : 0 to 5Vpp.
4. On Board RF carrier signal generator.
Frequency Range : 1 MHz and 455KHz.
5. On Board Band Pass Filter (452-458 KHz).
6. Modulator Type : Balanced modulator
7. Out Put Power Amplifier: : Variable Gain.
8. All parts are soldered on single pin TAGS on single PCB with complete circuit diagram Screen-printed.
9. Standard Accessories : 1. A Training Manual
2. Connecting Patch cords.

EXPERIMENTS

1. Study of carrier frequency generation
2. Study of DSB & SSB AM generation & transmission

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers and Kits
E-113, Jai Ambe Nagar,
Near Udgam School,
Thaltej,
AHMEDABAD - 380054.
INDIA.

Phone(O): +91-79-26852427/ 26850829
Phone(F): +91-79-26767512/ 26767648
Fax : +91-79-26840290/ 26840290
Mobile : +91-9824001168
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-