




CONTINUOUS VARIABLE SLOPE DELTA MODULATION DEMODULATION TRAINER

MODEL - CVSD100

This trainer has been designed with a view to provide practical and experimental knowledge of Continuous variable slope delta (CVSD) Modulation & Demodulation on single P.C.B.

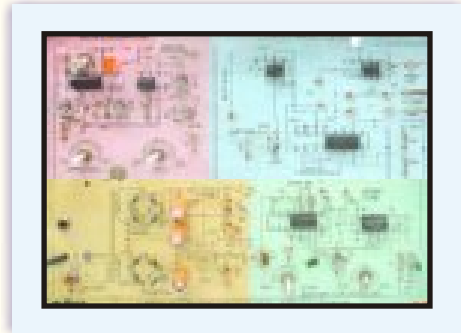

SPECIFICATIONS

1. Power supply requirement : 230V AC, 50 Hz.
2. Built in IC based power supply.
3. On Board AF Modulating signal generator - Sine wave
Frequency Range : 300 Hz to 3.4KHz
Amplitude : 0 to 5Vpp.
4. On Board Sampling Pulse signal generator.
Frequency Range : 2KHz to 32KHz
5. Sections : CVSD Modulation & CVSD Demodulation
6. Standard Accessories : 1. A Training Manual

In keeping view of SIGMA policy of continuous development and improvement, the Specifications may be changed without prior notice or obligation.

Sigma Trainers and Kits
E-113, Jai Ambe Nagar,
Near Udgam School,
Thaltej,
AHMEDABAD - 380054.
INDIA.

Phone(O): +91-79-26852427/ 26850829
Phone(F): +91-79-26767512/ 26767648
Fax : +91-79-26840290/ 26840290
Mobile : +91-9824001168
Email : sales@sigmatrainers.com
: sigmatrainers@sify.com
Web : www.sigmatrainers.com

Dealer:-